

Installation of Water Leak Sensor

Prepare the Surface

Ensure the installation surface is clean and dry for optimal adhesion.

Install the Water Leak Sensor


Peel off the liner from the adhesive tape located on the back of the water sensor.

Choose a Location

Place the sensor in areas prone to leaks, such as near sinks, RV tanks, or bathrooms.

Mount the Waggle RV Smart Sensor

Secure the sensor to a wall or nearby surface, positioning the probe where water is likely to leak.

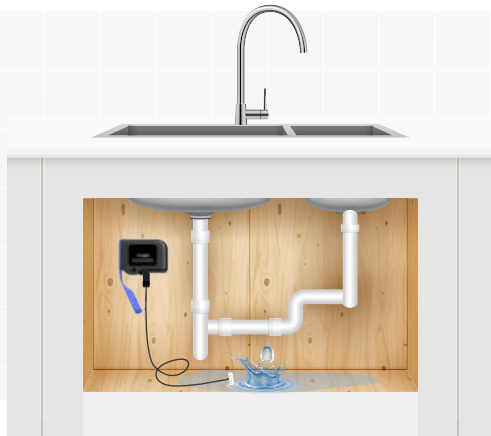

Our Paw-some products for RVers



Download the App



Warranty



Return Policy

mywaggle.com/policies/terms-of-service



In-App Chat Support



support@mywaggle.com



Waggle RV Smart Sensor

Door | Water Leak Sensors



USER MANUAL



In the box



RV Smart Sensor



Mounting Bracket



Adapter



Door Sensor Magnet



USB Cable



Reset Pin

Introduction

The Waggle RV Smart Sensor gives RVers peace of mind with real-time alerts for critical events like door activity (open/close) and water leaks—helping you prevent costly damage before it starts. It continuously monitors the status of your RV's doors and floors, instantly notifying your smartphone the moment door activity or a leak is detected—so you stay in control, no matter how far you roam.

Waggle: **Safety for your RV & Peace of mind for you!**



Setup the RV Smart Sensor

Step 1: Download the "Waggle Pet App"



App Store



Play Store



Step 2: Add the Sensor

- Open the Waggle Pet App and select **"Add Device"**
- Choose **"RV Smart Sensor"** from the list of devices.

Note: Remove the sensor from the mounting bracket to scan the **QR code** on the back.



QR Code

Step 3: Register the Sensor

- Scan the **QR code** on the back of the sensor

Step 4: Name/Type of the Sensor

- You can name your sensor, select its type, and specify its location (e.g., front door, window, kitchen sink, etc.).

Step 5: Pair the Sensor

- Press the **Reset button** on the sensor once and wait for the LED to blink. Then, tap the **'Pair Now'** button in the app.
- The app will first pair via Bluetooth, followed by WiFi connection.
- The sensor will scan for available WiFi networks and display them.
- Select your preferred WiFi network and enter the password to connect.

Important

- The Waggle RV Smart Sensor can be used as either a door sensor or a water leak sensor, but not both simultaneously. The sensor's battery lasts up to 90 days on a 4-5 hour charge.
- If a leak dries up within 30 seconds, the "normal" event notification will be sent to the only during the next report (~1 hour).

Installation of Door Sensor

Prepare the Surface

Ensure that the installation surface is clean and dry for optimal adhesion.

Install the Door Sensor Magnet

Peel off the protective liner of the adhesive tape on the back of the door sensor magnet accessory and install it on the door/window edge at your eye level.

Install the Waggle RV Smart Sensor

Peel off the protective liner from the adhesive tape on the back of the Waggle RV Smart Sensor. Install the sensor on the wall or door/window frame, ensuring the Waggle logo is upright and aligned with the sensor magnet installed from the previous step.

Note: The gap between the magnet and the RV Smart Sensor should be less than 10 mm. Always attach the RV Smart sensor to a stationary surface (e.g., door frame) and the magnet on the moving surface (e.g., door).

Caution

- Please ensure that the magnet is installed with the Waggle 'W' logo upright and aligned with the RV Smart Sensor.

